



2/12

**FIG. 2**

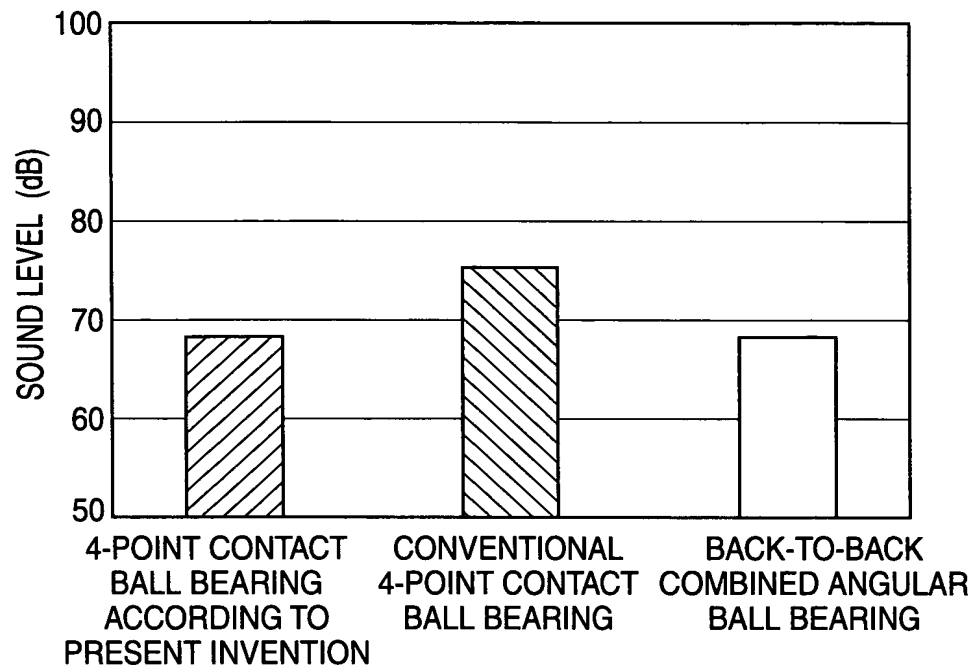


**FIG. 3**

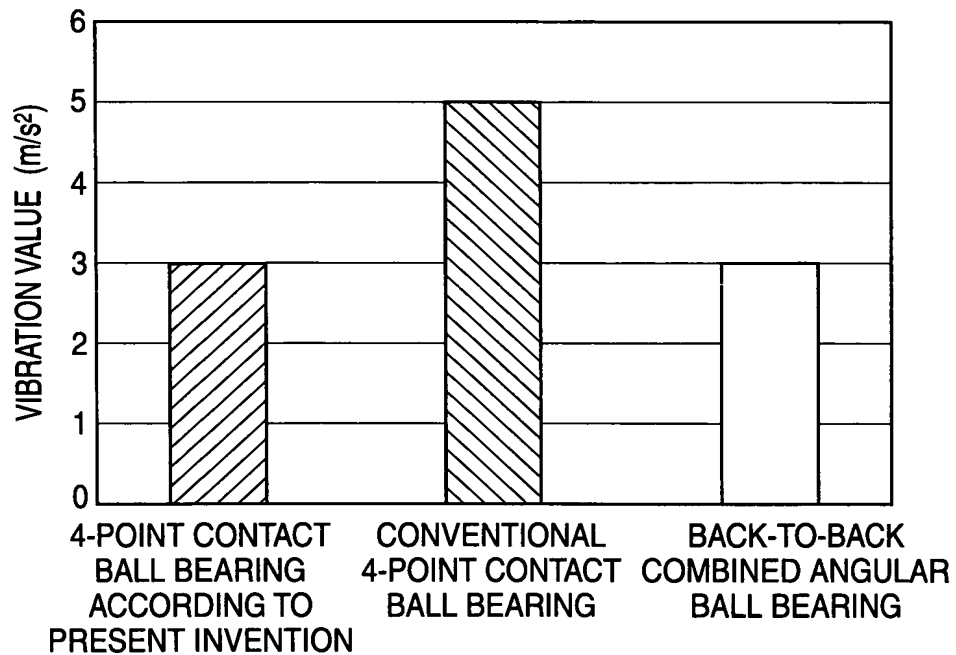


3/12

**FIG. 4**

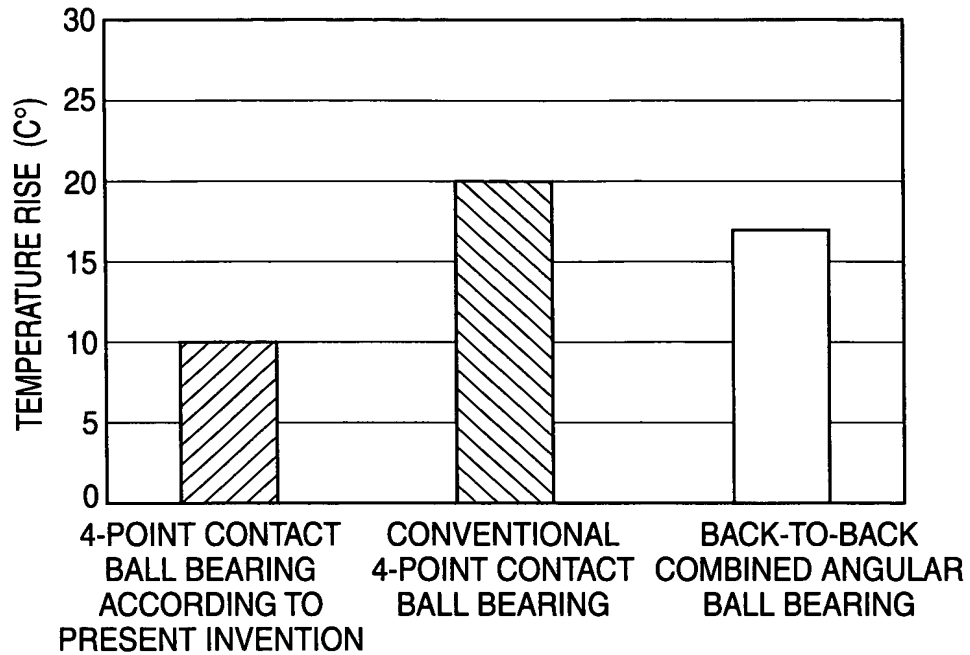


**FIG. 5**

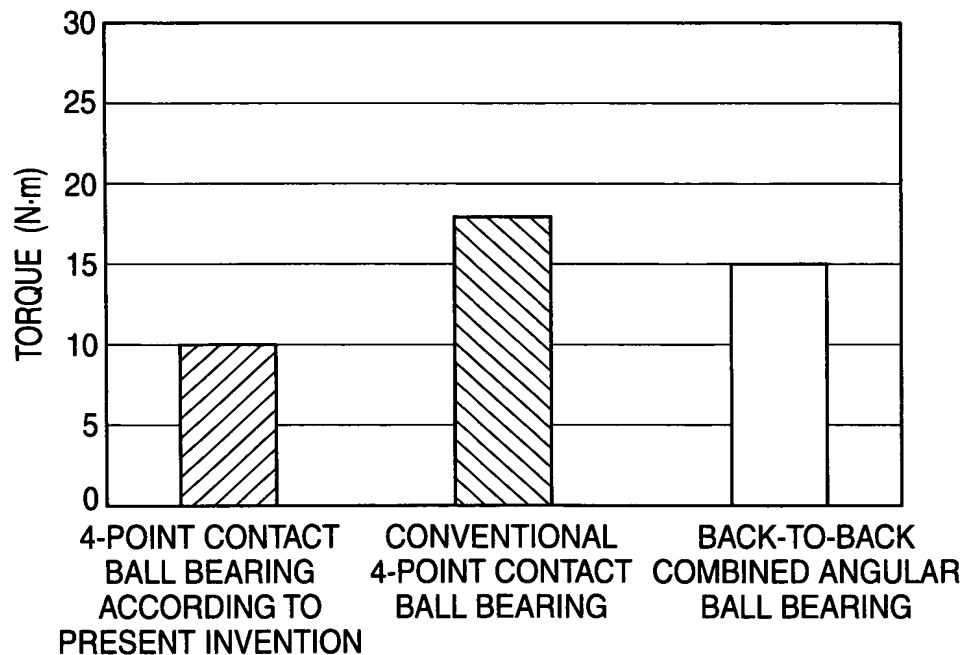


4/12


*FIG. 6*

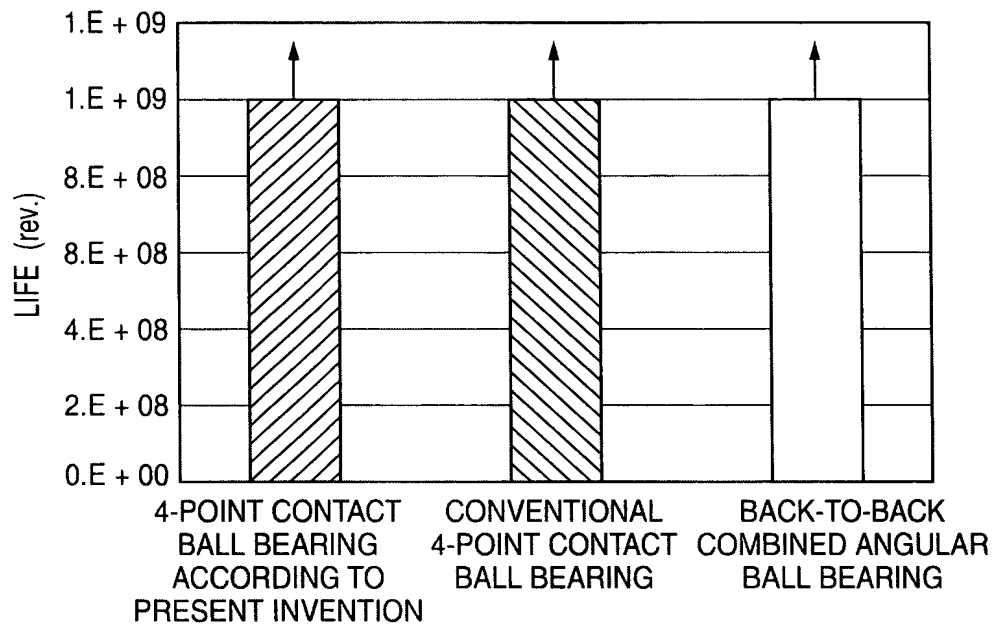


**FIG. 7**

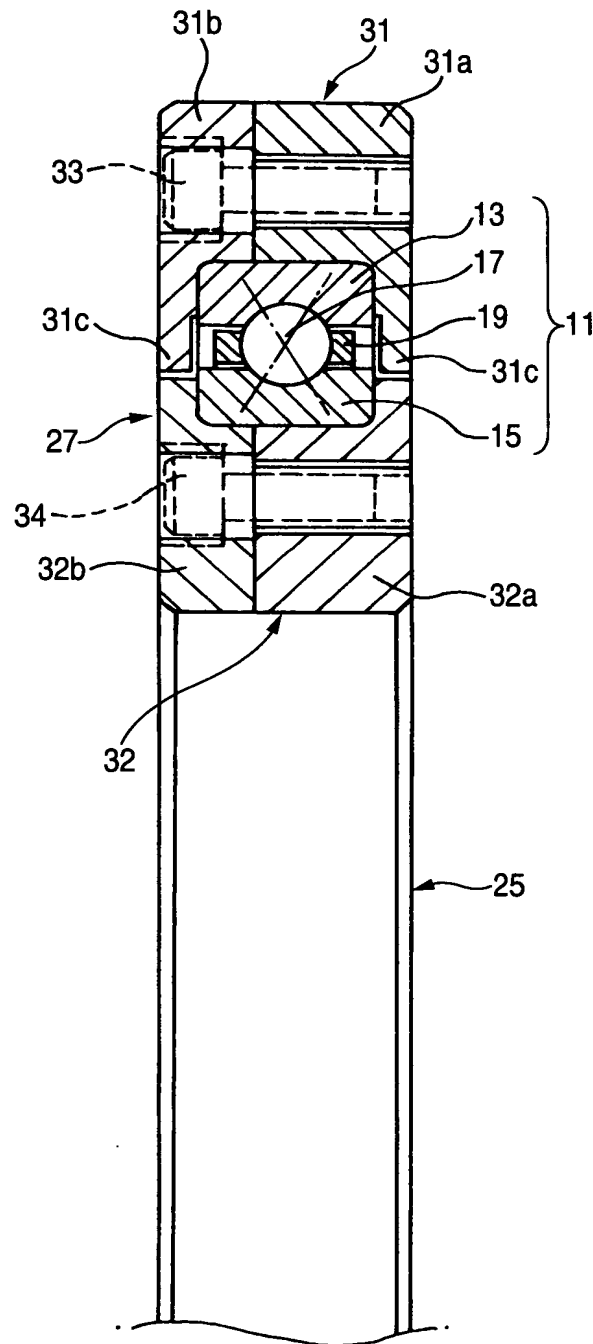

**FIG. 8**

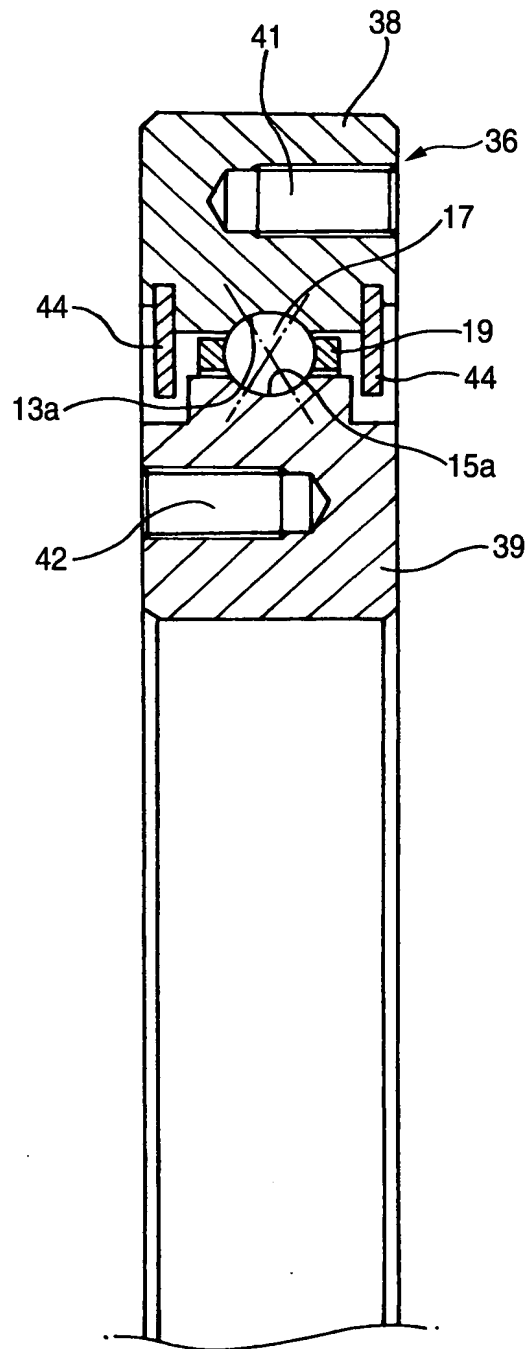


**FIG. 9**

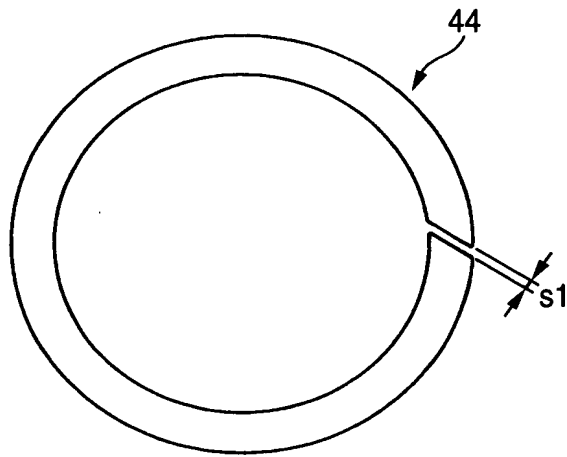

8/12


**FIG. 10**

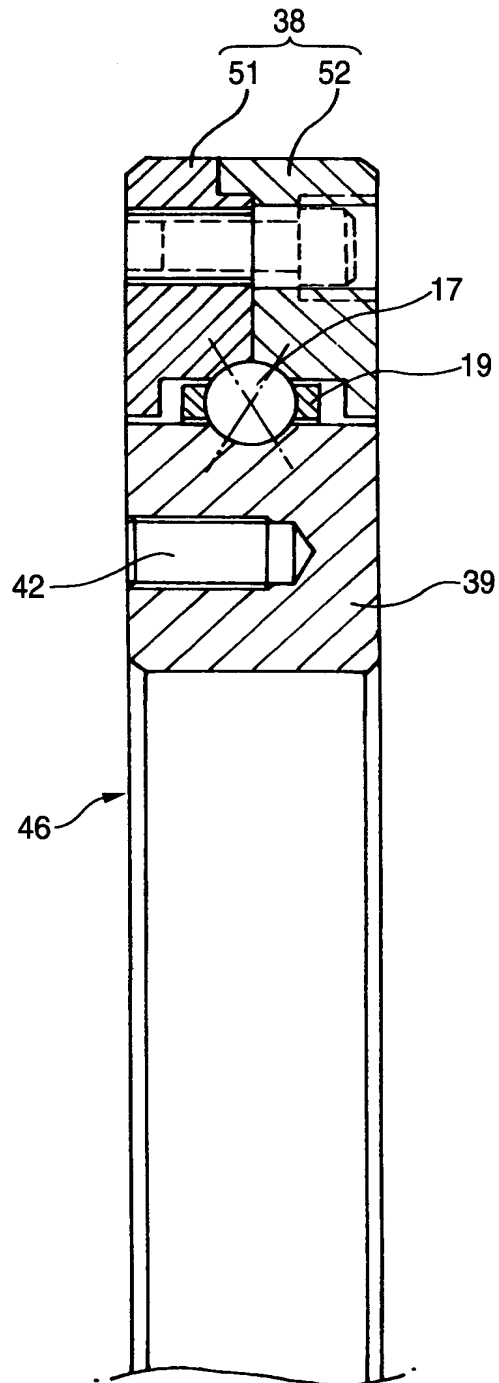




9/12

**FIG. 11**

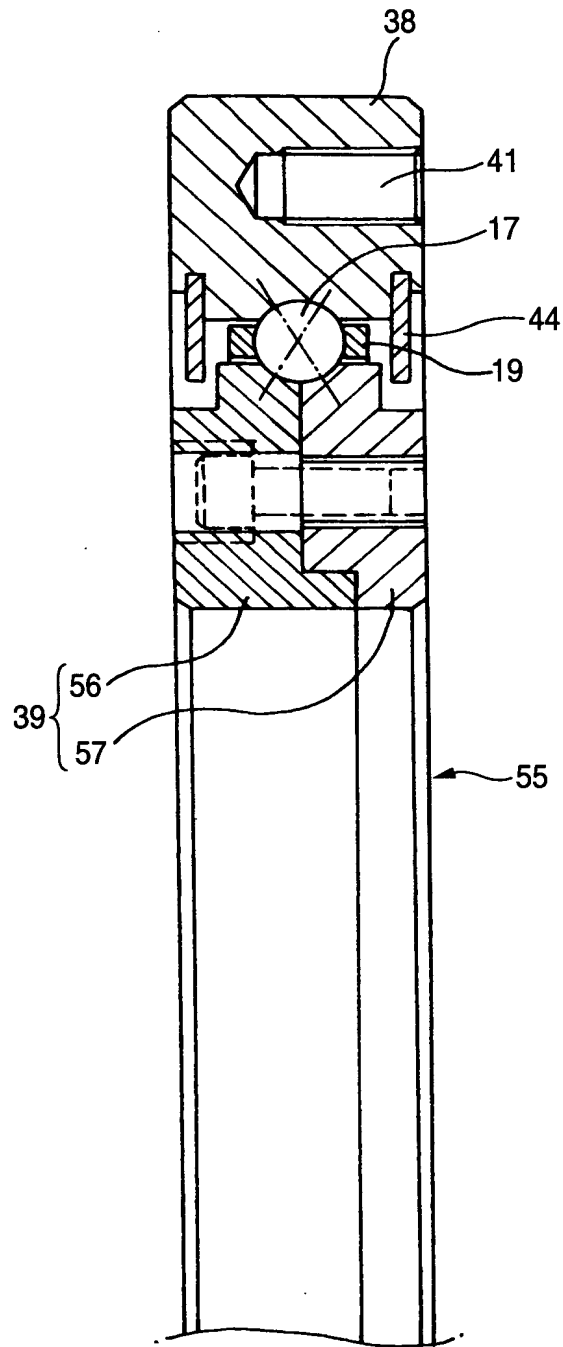

10/12


FIG. 12

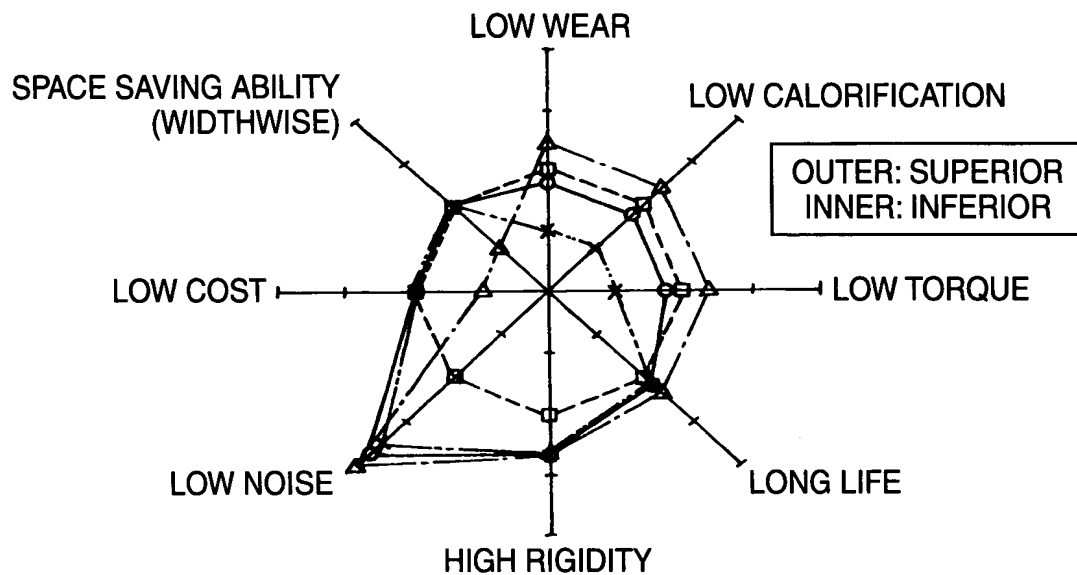

- : CONVENTIONAL 4-POINT CONTACT BALL BEARING (POSITIVE GAP)
- ×--- : CONVENTIONAL 4-POINT CONTACT BALL BEARING (NEGATIVE GAP)
- : 4-POINT CONTACT BALL BEARING ACCORDING TO PRESENT INVENTION (NEGATIVE GAP)
- △--- : BACK-TO-BACK COMBINED ANGULAR BALL BEARING (NEGATIVE GAP)

11/12

**FIG. 13**

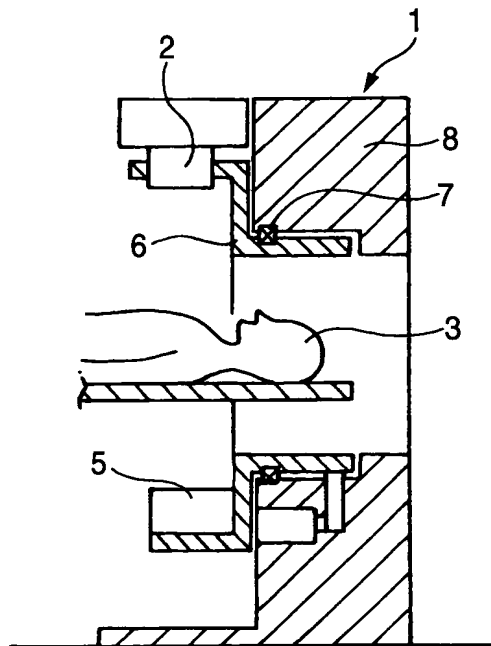

12/12

**FIG. 14**

